

PFT RITMO FC-400V double mix


The compact mixing pump with SmartControl system

Handy and compact mixing pump with ergonomic handles on all individual parts. For the first time with SmartControl - clear, intuitive operation and understandable error messages in many languages.



Lends a helping hand:

The SmartControl system from PFT.

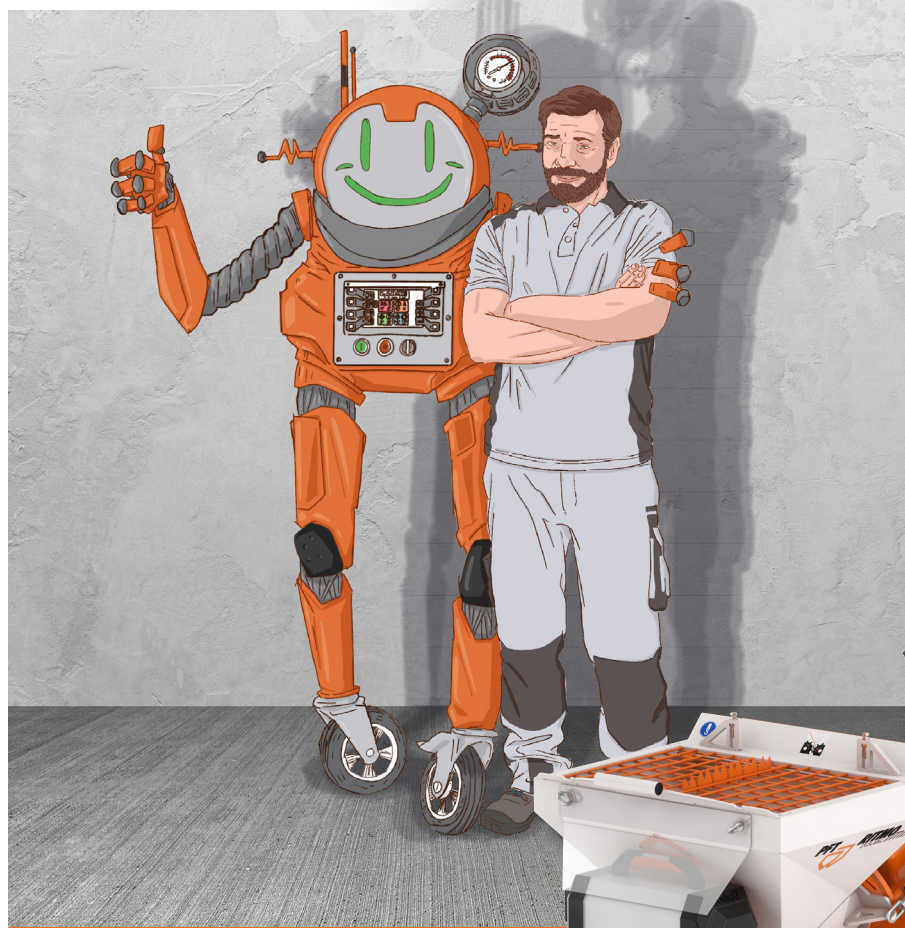


TECHNICAL DATA


Part no.	00 65 11 76
Rotor/Stator	TWISTER D 8-2 powercone
Conveying output	continuously adjustable up to 40 l/min
Conveying distance	up to 50 m
Working pressure	max. 30 bar
Drive	400 V, 3 Ph, 50 Hz, 5.5 kW, 10 - 400 rpm
Spraying gun	DN25-360° S14 200 Geka
Air compressor	COMP P-200, 400 V, 3 Ph, 50 Hz, 0.5 kW, 200 l/min
Water pump	AVP 500 400 V, 3 Ph, 50 Hz, 0.37 kW
Material output	DN25 male part
Material hose	RONDO DN25 - 10 m
Mixing tube	rubber
Hopper content	85 litres
Dimensions: L/W/H	1,744 / 650 / 1,145 mm
Filling height	1,000 mm
Weight	~ 172 kg

Please note:

Standard values depending on mortar quality, mortar composition, mortar consistency, pump version, pump condition, material hose diameter and delivery height. Ultimately, the respective guidelines of the material manufacturer are decisive.

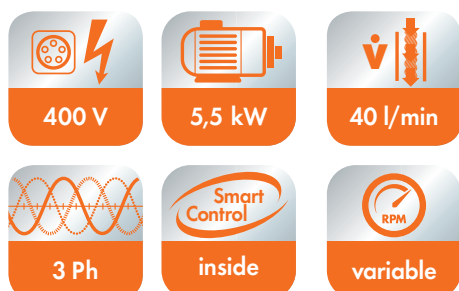

ADVANTAGES AT A GLANCE

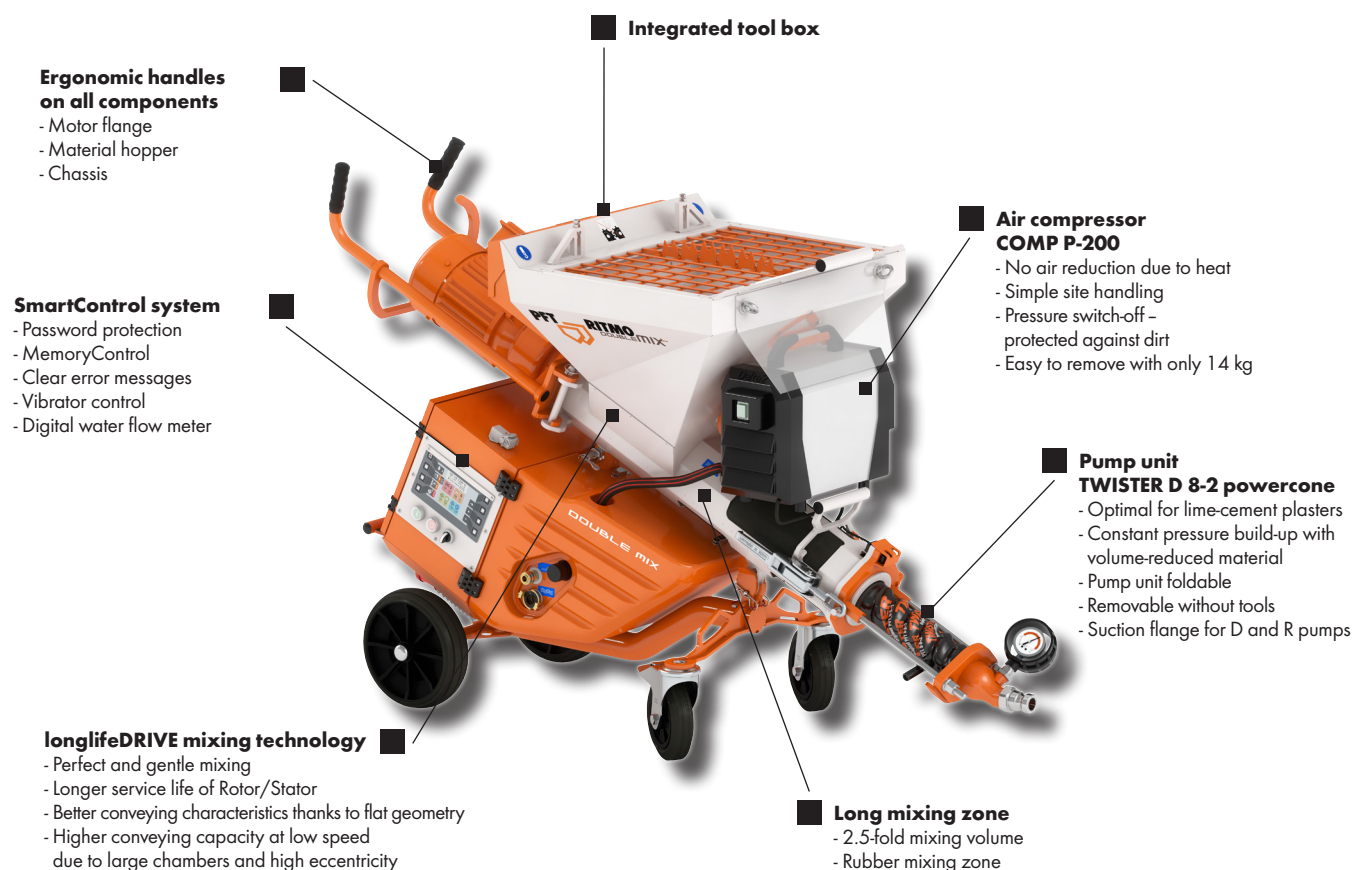

FIELDS OF APPLICATION	ACCESSORIES	PART NO.
<ul style="list-style-type: none"> ■ Lime gypsum plaster ■ Cement plaster ■ Gypsum plaster ■ Masonry mortar ■ Adhesive and reinforcing mortar ■ Insulation plaster ■ Floor screed 	<ul style="list-style-type: none"> ■ Extension cable 5 x 4 mm², RED 5-32 A – 50 m ■ Extension hopper 140 litres ■ ZARGOMAT pro DN25-360° ■ JETSET pro DN25 Ewo ■ Spraying set for finishing coats ■ DUSTCATCHER RITMO double mix cpl. ■ Injection hood (only in connection with: 00 20 18 70) 	<ul style="list-style-type: none"> 20 42 39 00 00 20 18 70 00 42 00 58 00 41 89 75 00 23 21 06 00 66 07 18 20 60 02 13

The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.net
www.youtube.com/knaufpft

Download now! APP: PFT – Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · DE-97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft.net www.pft.net

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

RITMO FC-400V double mix – EN/05.19/PFT